

LVDS CRYSTAL OSCILLATOR IN CERAMIC LCC PACKAGE - XO75LVDS Series

FEATURES


- RoHS Compliant (Pb-Free), LVDS Compatible Signals
- Inherent Low Power and Low EMI Emission
- Very Low Phase Jitter, No Internal PLL Avoids Cascading PLL Problems
- Complimentary Output, Tri-state Enable/Disable Standard, 7x5x2 mm SMD package

SPECIFICATIONS

Frequency Range	80 MHz to 320 MHz
Standard Frequency	80/100/106.25/125/133.33/155.52/156.25/161.1328/167 MHz
Input Voltage (Vcc)	B = +3.3 VDC \pm 5%; C = +2.5 VDC \pm 5%
Input Current	50 mA Maximum
Storage Temperature	-55°C to 125°C
Overall Frequency Stability	100 = \pm 100 ppm; 50 = \pm 50 ppm; 25 = \pm 25 ppm
Temperature Range	A = 0°C to 70°C; B = -40°C to 85°C
Standard Stability	50A = \pm 50 ppm / 0°C to 70°C
Electric Option (Duty Cycle)	1 = Tristate 60/40%; 3 = Tristate 55/45%; 5 = Tristate 52.5/47.5% 0 = No tristate 60/40%; 2 = No tristate 55/45%; 4 = No tristate 52.5/47.5%
Output Load	100 Ohms across differential outputs (Offset 1.25V Typ)
Logic "1" / Logic "0" Level	1.43V Typ / 1.10V Typ
Rise/Fall Time (Tr/Tf)	0.7 ns Maximum, 0.3 ns Typical at 20% to 80% Vp-p
Start-up time	5 ms Maximum
Phase Jitter (RMS, 1 Sigma)	1 ps Max for fj > 1KHz; 0.3 ps Typical for fj = 12KHz to 20MHz
Tristate Function	Input (Pin 1) High (> 0.7Vcc) or open: Output (Pin 4, 5) active Input (Pin 1) Low (< 0.3Vcc): Output disabled in high impedance
Enable/Disable Time	200 ns Maximum

Creating a Part Number

XO75LVDS-155M520-B50A1

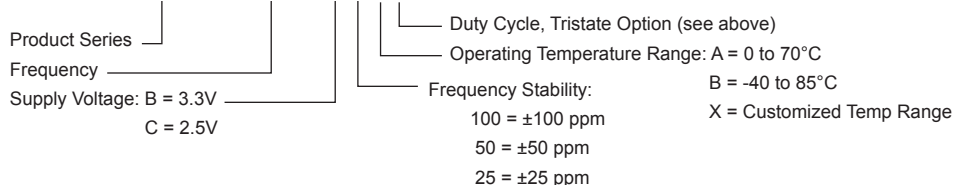

OUTLINE DRAWING

