

- 270 Series
- Applications
- Description
- P. vs T.



## 270 Series Rubidium Rival OCXO



### Applications

- \* Stratum II and IIIe+ Telephony
- \* Atomic Standard Replacement
- \* GPS Receivers
- \* Test and Measurement
- \* TDMA Base Stations
- \* PCS Base Stations
- \* Quasi-Synchronous Radio

### Description


The 270 series Double Oven Controlled Crystal Oscillator drops into a standard European CO-08 footprint and is available with an output frequency between 4.8 to 26 MHz. Utilizing a full-size TO-8 quartz resonator, the oscillator performs to the stability required for Stratum II and IIIe, GPS, and TDMA PCS applications. Specifications include thermal stability performance of 2.0E-10 to 5.0E-09 over a -30°C to +70°C ambient temperature range, steady-state power consumption of 1.7W from a nominal +12 VDC supply at 25°C ambient, warm-up power of 5.5 W typical, and frequency stability of 2.0E-08 after approximately 10 minutes. Typical RF output is +9 dBm ±2 dB sinewave (into a 50W load) with < -30 dBc harmonics and -80 dBc

spurious levels. Short-term stability at 1 sec is 7E-12.

The typical 5 MHz aging performance is 5E-10 per day and 5E-08 per year. The 270 series is an ideal solution for phase noise related issues. It delivers -100 dBc/Hz at a 1 Hz offset and -155 dBc/Hz at 10 kHz offset. Additionally, the supply voltage sensitivity and load sensitivity is 5E-11 for a 5 % change in voltage or load impedance. The electrical tuning range for a 5 MHz SC-cut third-overtone oscillator is specified as 4.0E-007 to 8.0E-007. An added feature is a 4.7 to 5.3 VDC high stability reference voltage output with a source resistance of 100 Ohms.

The units have been designed for high volume production and are 100 percent tested for:

### Performance vs. Temp

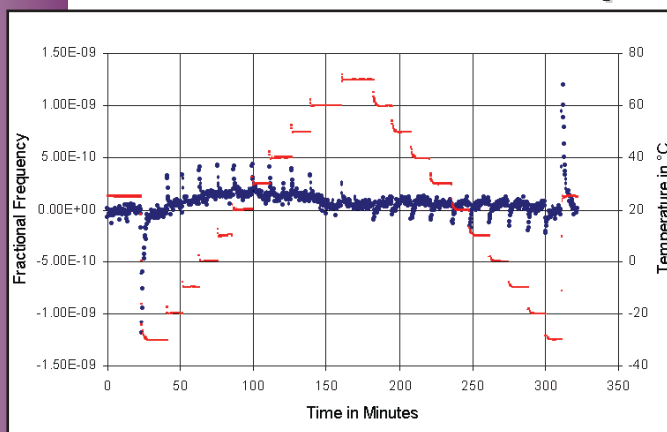

- |                   |                       |
|-------------------|-----------------------|
| Thermal Stability | Phase Noise           |
| Aging             | Short Term Stability  |
| Output Level      | Reference Voltage     |
| Spectral Purity   | Electric Tuning Range |

Housed in a hermetically sealed 1.423" x 1.071" x 0.765" (36.14 mm x 27.20 mm x 19.42 mm) package, these units occupy less than one-fifth the volume of the smallest high stability frequency reference currently available.

Custom frequency outputs and specifications available upon request.

(over)

**270 Series**  
 - Specifications  
 - ICD  
 - Contact Us

# Specifications

<b>Frequency</b>	1.00000000E+007 Hz	<b>Warm Up Time</b>	10.0 Mins
<b>Initial Tolerance</b>	± 0.0E+000	<b>DF/F</b>	2.0E-008
<b>Crystal Cut</b>	SC	<b>Reference Time</b>	60.0 Mins
<b>OT</b>	3		
<b>Thermal Stability</b>	2.0E-010	<b>Retrace Time Off</b>	5.0E-009
<b>Temperature Range</b>		<b>Time On</b>	24.0 Hrs
<b>Minimum</b>	-30°C		2.0 Hrs
<b>Maximum</b>	70°C		
<b>Aging</b>		<b>Warm Up Power</b>	
<b>Per Day</b>	5.0E-010	<b>Typical</b>	5.500 W
<b>Per Month</b>	0.0E+000	<b>Minimum</b>	4.950 W
<b>Per Year</b>	5.0E-008	<b>Maximum</b>	6.050 W
<b>Output Type</b>	+9 dBm ±2 dB Sine	<b>Continuous Power</b>	
<b>Sine</b>		<b>Typical</b>	1.700 W
<b>Nominal</b>	9.000 dBm	<b>Minimum</b>	1.300 W
<b>Minimum</b>	7.000 dBm	<b>Maximum</b>	2.100 W
<b>Maximum</b>	11.000 dBm	<b>Supply Voltage</b>	
<b>Harmonics</b>	-30 dBc	<b>Nominal</b>	12.00 V
<b>Subharmonics</b>	-0 dBc	<b>Minimum</b>	11.40 V
<b>Spurious</b>	-80 dBc	<b>Maximum</b>	12.60 V
<b>Phase Noise @ Offsets of</b>		<b>Reference Voltage</b>	
<b>1 Hz</b>	-90 dBc/Hz	<b>Minimum</b>	4.7 V
<b>10 Hz</b>	-120 dBc/Hz	<b>Maximum</b>	5.3 V
<b>100 Hz</b>	-140 dBc/Hz	<b>Source Resistance</b>	1.000E+002 Ω
<b>1000 Hz</b>	-150 dBc/Hz	<b>Tuning Voltage</b>	
<b>10000 Hz</b>	-155 dBc/Hz	<b>Minimum</b>	0.0 V
<b>100000 Hz</b>	-155 dBc/Hz	<b>Maximum</b>	5.0 V
<b>Short Term Stability</b>		<b>Tuning Slope</b>	Positive
<b>1 Sec</b>	7.0E-012	<b>Tuning Input Resistance</b>	5.000E+004 Ω
<b>10 Sec</b>	0.0E+000	<b>Bandwidth</b>	4.000E+002 Hz
<b>Supply Voltage Sensitivity (± 5%)</b>		<b>Tuning Linearity</b>	10%
<b>dF/dV</b>	1.0E-010	<b>Electrical Tuning</b>	
<b>Load Sensitivity (± 5%)</b>		<b>Minimum</b>	± 1.2E-006
<b>dF/dL</b>	1.0E-010	<b>Maximum</b>	± 3.6E-006
<b>g-Sensitivity</b>		<b>Mechanical Tuning</b>	
<b>dF/dG</b>	0.0E+000	<b>Minimum</b>	± 0.0E+000
		<b>Maximum</b>	± 0.0E+000

Model #270-0225

## Interface Control Drawing



Two New Pasture Road  
 Newburyport, MA 01950  
 Phone: 978-465-6064  
 Fax: 978-465-6637

For more information go to  
[www.mti-milliren.com](http://www.mti-milliren.com)  
 or e-mail us at  
[jdsales@mti-milliren.com](mailto:jdsales@mti-milliren.com)

