



# 36.75MHz CATV Filter Part Number B0537

## Typical Performance

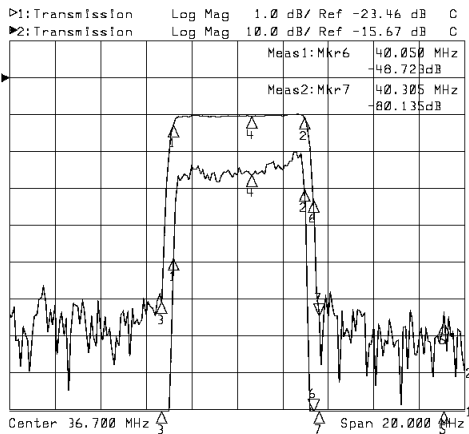

Horizontal: 2MHz/Div  
Vertical: 1dB/Div&10dB/Div


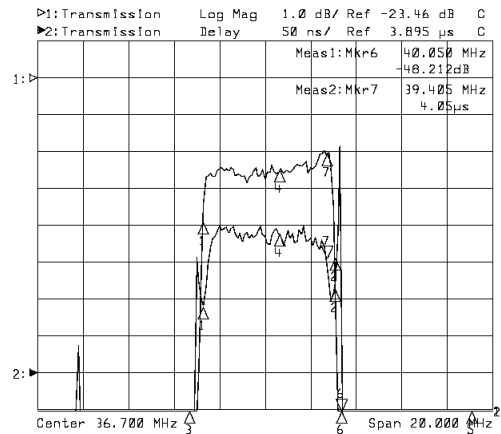


Horizontal: 2MHz/Div  
Vertical: 50nsec/Div&1dB/Div

## Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	36.25	36.75	37.25
Insertion Loss at F0	dB		26.00	27.00
@39.65MHz	dB	0.95	1.00	
@33.90MHz	dB	2.95	3.00	
@40.05MHz	dB		23.00	23.50
@33.40MHz	dB		50.00	50.50
Passband Variation	dB		0.70	1.00
Group Delay Variation	nsec		45	50
Absolute Delay	usec		4.05	4.07
Ultimate Rejection	dB	48	50	
Substrate Material	-		YZ-LiNbO3	
Ambient Temperature	°C	-40	25	80

## Package (inch)

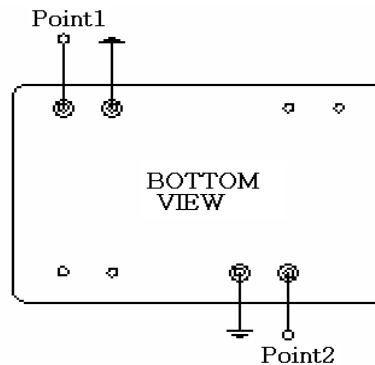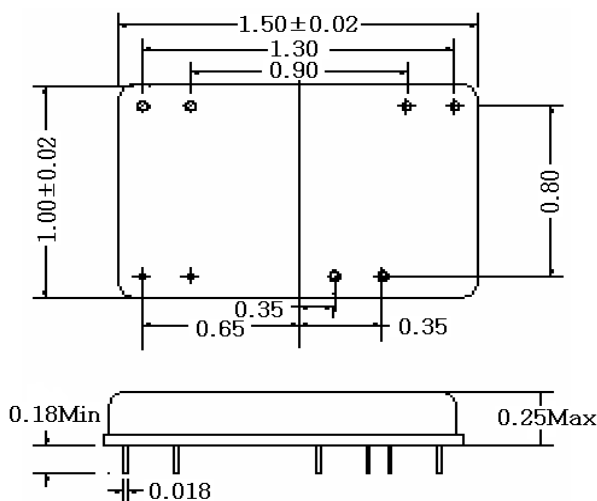

No Matching Required  
Source/Load Impedance=50ohm  
Package Style YS